


3/4"-14NPT
Male Connection

9/16" MP Male Connection
(13/16"-16UNF Thread)

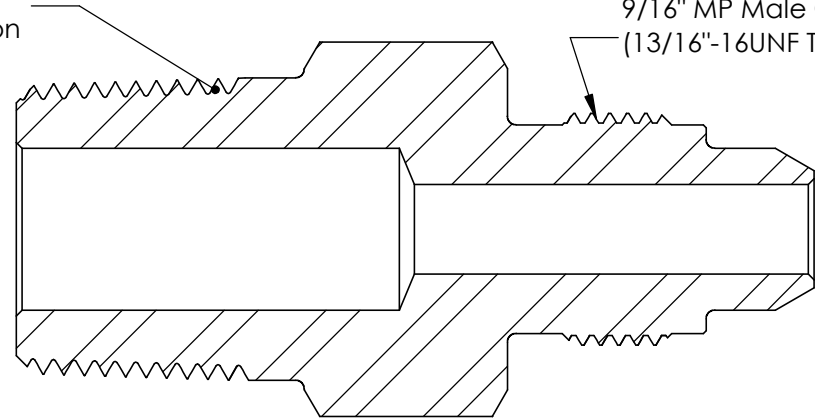

SECTION B-B

REVISION NOTES AND DATES

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES
TOLERANCES AS FOLLOWS:

1 PLACE DECIMAL (.0): ±.030
2 PLACE DECIMAL (.00): ±.020
3 PLACE DECIMAL (.000): ±.010
ANGLES: ±2°

SURFACE FINISH: 63RMS
BREAK ALL EDGES: .010-.015
FILLETS & ROUND: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B
CHAMFER THREADS 45° TO ROOT
30° CHAMFER IS OPTIONAL
FOR MALE THREADS ONLY

	NAME	DATE
DRAWN	BM	9/12/2022
CHECKED	KH	09/28/2022
DATE STARTED IN PRODUCTION:		
09/28/2022		



Ultra Pressure Components
We can handle Pressure

**ULTRA PRESSURE COMPONENTS
HOUSTON, TX**

TITLE:

3/4"NPT Male x 9/16" MP Male
10,000 psi

SIZE	DWG. NO.	REV
A	5404-12N9M	Y
SCALE: 1.5:1	WEIGHT: 0.43	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.