


1/2"-14NPT
Male Thread

3/4" Type M Male
3/4"-16UN Thread

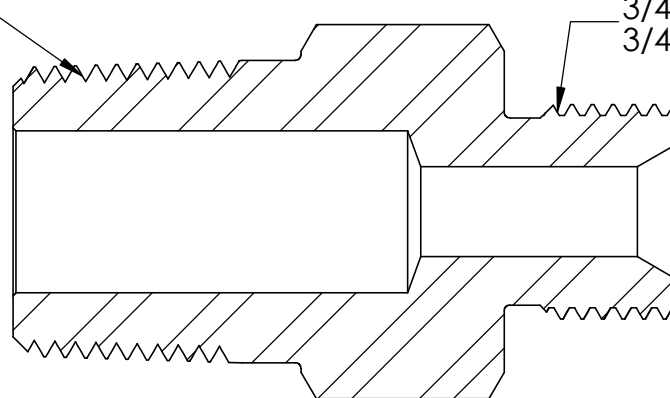

SECTION A-A

REVISION NOTES AND DATES

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES
TOLERANCES AS FOLLOWS:
1 PLACE DECIMAL (.0): $\pm .020$
2 PLACE DECIMAL (.00): $\pm .010$
3 PLACE DECIMAL (.000): $\pm .005$
ANGLES: $\pm 2^\circ$

SURFACE FINISH: 63RMS
BREAK ALL EDGES: .010-.015
FILLETS & ROUNDS: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B
CHAMFER THREADS 45° TO ROOT
30° CHAMFER IS OPTIONAL
FOR MALE THREADS ONLY

	NAME	DATE
DRAWN	BM	7/12/2023
CHECKED	KH	7/12/2023
DATE STARTED IN PRODUCTION:		
7/12/2023		



**ULTRA PRESSURE COMPONENTS
HOUSTON, TX**

TITLE:
1/2" MALE NPT X 1/2" MALE TYPE M
10,000 psi

SIZE A	DWG. NO. 5404-12NM12	REV Y
SCALE: 1.5:1	WEIGHT: 0.39	SHEET 1 OF 1