


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS


DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY

PROHIBITED.

REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS

5

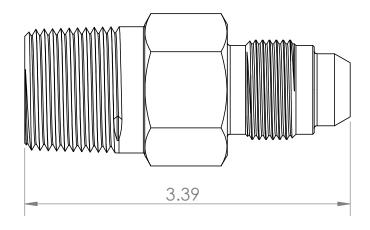



1"-11.5NPT
Male Connection

3/4" Medium Pressure Male
(3/4"-14NPSM Thread)

revision notes and dates	TOLERANCES AS FOLLOWS:	
	1 PLACE DECIMAL (.0): ±.030 2 PLACE DECIMAL (.00): ±.020 3 PLACE DECIMAL (.000): ±.010 ANGLES: ±2°	
	SURFACE FINISH: 63RMS BREAK ALL EDGES: .010015 FILLETS & ROUINDS: R.015 - 0.30	
	THREADS UNIFIED CLASS 2A - 2B CHAMFER THREADS 45° TO ROOT 30° CHAMFER IS OPTIONAL FOR MALE THREADS ONLY	

	UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
	ALL DIMENSIONS ARE IN INCHES TOLERANCES AS FOLLOWS:	DRAWN	ВМ	9/13/2022	
	1 PLACE DECIMAL (.0): ±.030	CHECKED	KH	09/28/2022	-
	2 PLACE DECIMAL (.00): ±.020 3 PLACE DECIMAL (.000): ±.010 ANGLES: ±2°	DATE STARTED IN PRODUCTION:			
		09/28/2022			
	SURFACE FINISH: 63RMS BREAK ALL EDGES: .010015	Tuly,			



## ULTRA PRESSURE COMPONENTS HOUSTON, TX

TITLE:

1" NPT Male x 3/4" MP Male 10,000 psi

A

SCALE: 1:1

SIZE DWG. NO.

REV Y

5404-16N12M

WEIGHT: 0.82

SHEET 1 OF 1

4 3