


1"-11.5NPT
Male Connection

1-1/4"-11.5NPT
Male Connection

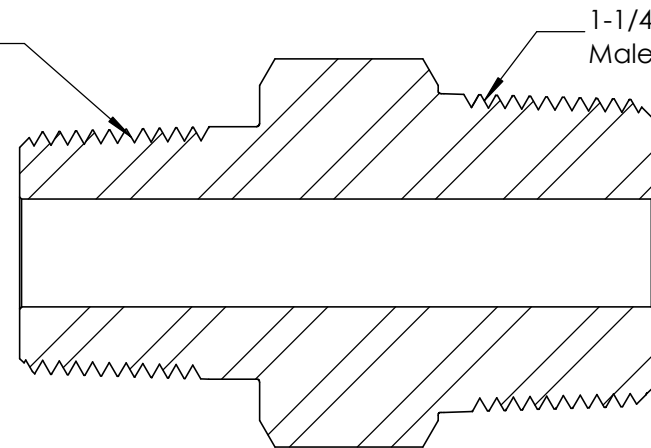

SECTION A-A

REVISION NOTES AND DATES

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES
TOLERANCES AS FOLLOWS:
1 PLACE DECIMAL (.0): ±.030
2 PLACE DECIMAL (.00): ±.020
3 PLACE DECIMAL (.000): ±.010
ANGLES: ±2°

SURFACE FINISH: 63RMS
BREAK ALL EDGES: .010-.015
FILLETS & ROUNDS: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B
CHAMFER THREADS 45° TO ROOT
30° CHAMFER IS OPTIONAL
FOR MALE THREADS ONLY

| | NAME | DATE |
|-----------------------------|------|------------|
| DRAWN | MH | 06/16/2022 |
| CHECKED | KH | 06/16/2022 |
| DATE STARTED IN PRODUCTION: | | |
| 06/16/2022 | | |

**ULTRA PRESSURE COMPONENTS
HOUSTON, TX**

TITLE:

1" NPT Male x 1-1/4" NPT Male
7,500 psi

| | | |
|------------------|-------------------------|-----------------|
| SIZE A | DWG. NO. 5404-16N20N | REV Y |
| SCALE: 1:1 | WEIGHT: 1.53 | SHEET 1 OF 1 |



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.