


1/16"-27NPT  
Male Connection

1/8"-27NPT  
Male Connection

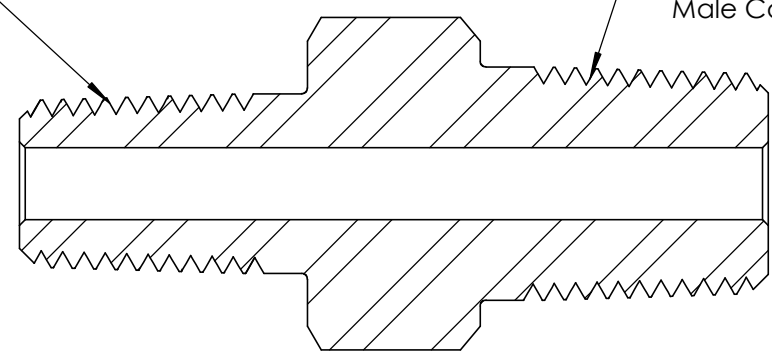

**SECTION A-A**

REVISION NOTES AND DATES

UNLESS OTHERWISE SPECIFIED:  
 ALL DIMENSIONS ARE IN INCHES  
 TOLERANCES AS FOLLOWS:  
 1 PLACE DECIMAL (.0): ±.030  
 2 PLACE DECIMAL (.00): ±.020  
 3 PLACE DECIMAL (.000): ±.010  
 ANGLES: ±2°  
 SURFACE FINISH: 63RMS  
 BREAK ALL EDGES: .010-.015  
 FILLETS & ROUNDINGS: R.015 - 0.30  
 THREADS UNIFIED CLASS 2A - 2B  
 CHAMFER THREADS 45° TO ROOT  
 30° CHAMFER IS OPTIONAL  
 FOR MALE THREADS ONLY

	NAME	DATE
DRAWN	MH	05/23/2022
CHECKED	KH	05/23/2022
DATE STARTED IN PRODUCTION:		
05/23/2022		

**ULTRA PRESSURE COMPONENTS  
HOUSTON, TX**

TITLE:  
 1/16" NPT Male x 1/8" NPT Male  
 15,000 psi

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 ULTRA PRESSURE COMPONENTS. ANY  
 REPRODUCTION IN PART OR AS A WHOLE  
 WITHOUT THE WRITTEN PERMISSION OF  
 ULTRA PRESSURE COMPONENTS IS  
 PROHIBITED.



SIZE <b>A</b>	DWG. NO. 5404-1N2N	REV <b>Y</b>
SCALE: 3:1	WEIGHT: 0.04	SHEET 1 OF 1