


1/8"-27NPT  
Male Connections  
Both Ends

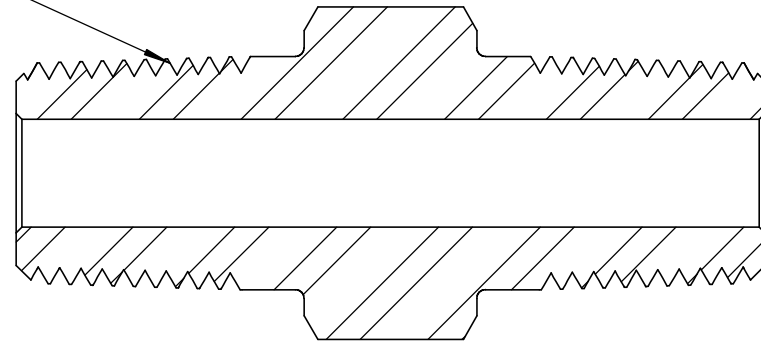

## SECTION A-A

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES AS FOLLOWS:  
1 PLACE DECIMAL (.0) : ±.030  
2 PLACE DECIMAL (.00) : ±.020  
3 PLACE DECIMAL (.000) : ±.010  
ANGLES: ±2°

SURFACE FINISH: 63RMS  
BREAK ALL EDGES: .010-.015  
FILLETS & ROUNDINGS: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B  
CHAMFER THREADS 45° TO ROOT  
30° CHAMFER IS OPTIONAL  
FOR MALE THREADS ONLY

	NAME	DATE
DRAWN	MH	05/23/2022
CHECKED	KH	05/23/2022
DATE STARTED IN PRODUCTION:		
05/23/2022		



We can handle Pressure

**ULTRA PRESSURE COMPONENTS  
HOUSTON, TX**

TITLE:

1/8" NPT Male x 1/8" NPT Male  
15,000 psi

SIZE	DWG. NO.	REV
<b>A</b>	5404-2N2N	<b>Y</b>

SCALE: 3:1      WEIGHT: 0.04      SHEET 1 OF 1

REVISION NOTES AND DATES

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.