



WITHOUT THE WRITTEN PERMISSION OF


5

ULTRA PRESSURE COMPONENTS IS

PROHIBITED.

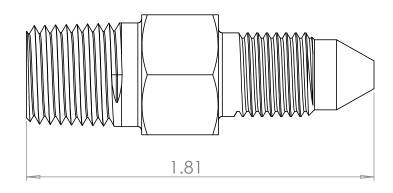

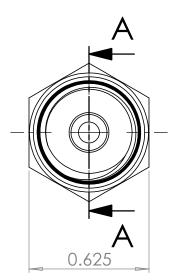

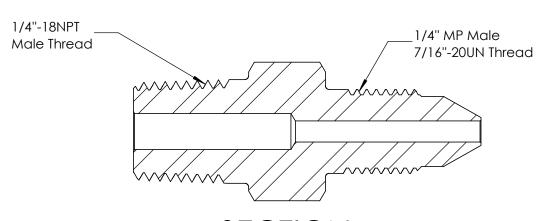

## SECTION A-A

		UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES
	revision notes and dates	TOLERANCES AS FOLLOWS: 1 PLACE DECIMAL (.0): ±.030
		2 PLACE DECIMAL (.00): ±.020 3 PLACE DECIMAL (.000): ±.010 ANGLES: ±2°
		SURFACE FINISH: 63RMS
PROPRIETARY AND CONFIDENTIAL		BREAK ALL EDGES: .010015 FILLETS & ROUINDS: R.015 - 0.30
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE		THREADS UNIFIED CLASS 2A - 2B CHAMFER THREADS 45° TO ROOT 30° CHAMFER IS OPTIONAL

):		NAME	DATE	
	DRAWN	MH	06/29/2022	
	CHECKED	KH	06/29/2022	-
	DATE STA	ARTED IN PRO	DDUCTION:	

06/29/2022

ultra Pressure components We can handle Pressure

## ULTRA PRESSURE COMPONENTS HOUSTON, TX

TITLE:

1/4" NPT Male x 1/4" MP Male 15,000 psi

A

SCALE: 2:1

SIZE DWG. NO.

REV Y

5404-4N4M

WEIGHT: 0.09

HT: 0.09 SHEET 1 OF 1

4 3

FOR MALE THREADS ONLY