


3/8"-18NPT
Male Thread

3/4" MP Male
3/4"-14NPSM Thread

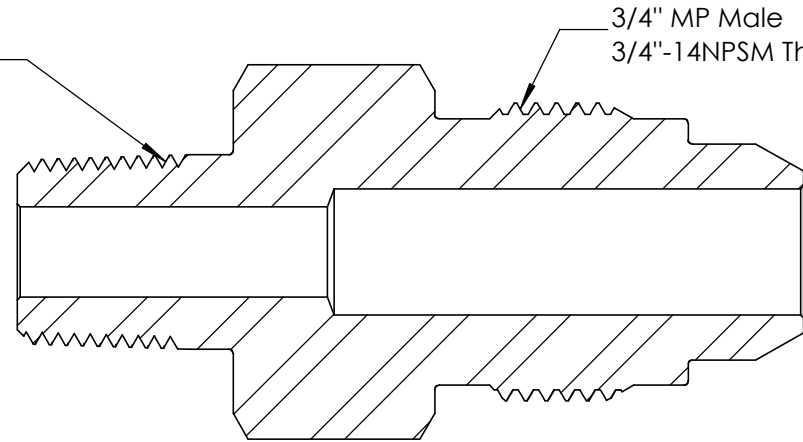

SECTION A-A

REVISION NOTES AND DATES

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES
TOLERANCES AS FOLLOWS:
1 PLACE DECIMAL (.0): ±.030
2 PLACE DECIMAL (.00): ±.020
3 PLACE DECIMAL (.000): ±.010
ANGLES: ±2°

SURFACE FINISH: 63RMS
BREAK ALL EDGES: .010-.015
FILLETS & ROUNDS: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B
CHAMFER THREADS 45° TO ROOT
30° CHAMFER IS OPTIONAL
FOR MALE THREADS ONLY

	NAME	DATE
DRAWN	MH	07/21/2022
CHECKED	KH	07/21/2022
DATE STARTED IN PRODUCTION:		
07/21/2022		



**ULTRA PRESSURE COMPONENTS
HOUSTON, TX**

TITLE:
3/8" NPT Male x 3/4" MP Male
15,000 psi

SIZE A	DWG. NO. 5404-6N12M	REV Y
------------------	------------------------	-----------------

SCALE: 1.5:1 WEIGHT: 0.42 SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.