


9/16" Type M Male
9/16"-18UN Thread
PER MASTER_M9 rev1

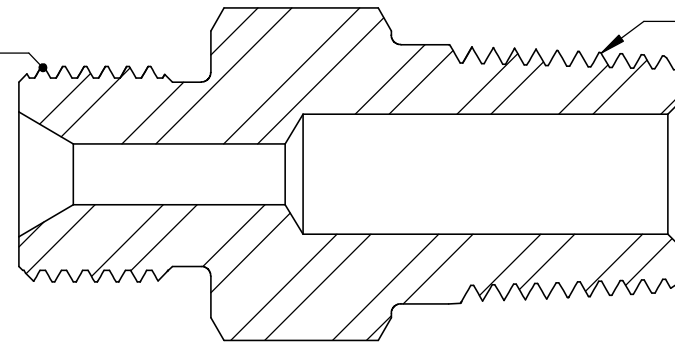

1/2"-14 NPT Male
PER MASTER_8NM rev1

SECTION A-A
SCALE 2 : 1

REVISION NOTES AND DATES

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

- 1) DIMENSIONS ARE IN INCHES
- 2) TOLERANCES:
FRACTIONAL $\pm 1/64"$
ANGULAR: MACH $\pm 2^\circ$
ONE PLACE DECIMAL $\pm .020$
TWO PLACE DECIMAL $\pm .010$
THREE PLACE DECIMAL $\pm .005$
- 3) THREADS UNIFIED CLASS
2A - 2B
- 4) SURFACE FINISH 63 μ in Ra
- 5) CHAMFER THREADS:
MALE - 30° TO ROOT
FEMALE - 45° TO ROOT

	NAME	DATE
DRAWN	MH	7/18/2013
CHECKED	KH	02/27/17

DATE STARTED IN PRODUCTION:

02/27/17



**ULTRA PRESSURE COMPONENTS
HOUSTON, TX**

TITLE:

3/8" MALE NPT X 9/16" TYPE M MALE
15,000 PSI

SIZE
A

DWG. NO.
5404-6NM9

REV
Y

SCALE: 2:1

WEIGHT: 0.13

SHEET 1 OF 1