


1/2"-14NPT Male Connection



REVISION NOTES AND DATES	TOLERANCES AS FOLLOWS:
	1 PLACE DECIMAL (.0): ±.030 2 PLACE DECIMAL (.00): ±.020 3 PLACE DECIMAL (.000): ±.010 ANGLES: ±2°
	SURFACE FINISH: 63RMS BREAK ALL EDGES: .010015 FILLETS & ROUINDS: R.015 - 0.30
	THREADS UNIFIED CLASS 2A - 2B CHAMFER THREADS 45° TO ROO' 30° CHAMFER IS OPTIONAL FOR MAIE THREADS ONLY

	UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
	ALL DIMENSIONS ARE IN INCHES TOLERANCES AS FOLLOWS:	DRAWN	ВМ	9/12/2022	
1 PLACE DECIMAL (.0): ±.030	CHECKED	KH	09/19/2022	T	
2 PLACE DECIMAL (.00): ±.020 3 PLACE DECIMAL (.000): ±.010 ANGLES: ±2°	DATE STARTED IN PRODUCTION:				
	09/19/2022				

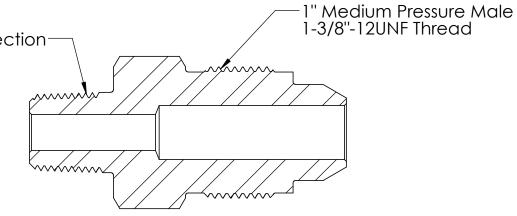

## **ULTRA PRESSURE COMPONENTS** HOUSTON, TX

TITLE:

1/2" NPT Male x 1" MP Male 15,000 psi

SIZE DWG. NO.

**REV** 

5404-8N16M

**SCALE: 1:2** 

**WEIGHT: 0.83** SHEET 1 OF 1

WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS

DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY

PROHIBITED.

REPRODUCTION IN PART OR AS A WHOLE

5

3

2