


1/2"-14NPT  
Male Thread

3/8" MP Male  
9/16"-18UN Thread

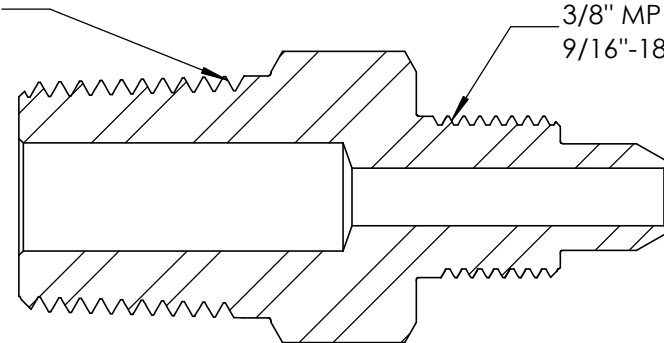

## SECTION A-A

### REVISION NOTES AND DATES

#### PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES AS FOLLOWS:  
1 PLACE DECIMAL (.0):  $\pm 0.030$   
2 PLACE DECIMAL (.00):  $\pm 0.020$   
3 PLACE DECIMAL (.000):  $\pm 0.010$   
ANGLES:  $\pm 2^\circ$

SURFACE FINISH: 63RMS  
BREAK ALL EDGES: .010-.015  
FILLETS & ROUNDS: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B  
CHAMFER THREADS 45° TO ROOT  
30° CHAMFER IS OPTIONAL  
FOR MALE THREADS ONLY

	NAME	DATE
DRAWN	MH	08/08/2022
CHECKED	KH	08/08/2022
DATE STARTED IN PRODUCTION:		
08/08/2022		



**ULTRA PRESSURE COMPONENTS  
HOUSTON, TX**

TITLE:

1/2" NPT Male x 3/8" MP Male  
15,000 psi

SIZE <b>A</b>	DWG. NO. 5404-8N6M	REV <b>Y</b>
SCALE: 1.5:1	WEIGHT: 0.21	SHEET 1 OF 1