



5

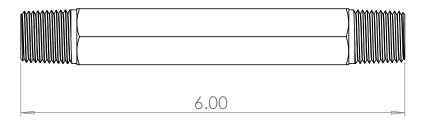



1/2"-14NPT
Male Thread
Both Ends

SECTION A-A

		UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCES AS FOLLOWS: 1 PLACE DECIMAL (.0): ±.030 2 PLACE DECIMAL (.00): ±.020 3 PLACE DECIMAL (.000): ±.010 ANCLES: ±0°	DRAWN	NAME	DATE 06/09/2022	ULTRA PRESSURE COMPONENTS HOUSTON, TX			TS
	REVISION NOTES AND DATES  1 PLACE DECIMAL (.0): ±.03 2 PLACE DECIMAL (.00): ±.03		CHECKED	KH	06/09/2022	TITLE:			
			DATE STARTED IN PRODUCTION:		1/2" x 6" NPT Male Hex Nipple 15,000 psi				
			06/09/2022						
PROPRIETARY AND CONFIDENTIAL		BREAK ALL EDGES: .010015 FILLETS & ROUINDS: R.015 - 0.30	July 1						
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.		THREADS UNIFIED CLASS 2A - 2B CHAMFER THREADS 45° TO ROOT 30° CHAMFER IS OPTIONAL FOR MALE THREADS ONLY				SIZE DWG. NO.		1	REV
			ultra	) Tess	THE STEE	5404-8N8N-6.0 Y			
			We can		n handle Pressure	SCALE: 1:1.5	WEIGHT: 0.86	SHEET 1	OF 1

4 3