


9/16" Type M Male
9/16"-18UN Thread

1/4" MP Male
7/16"-20UN Thread

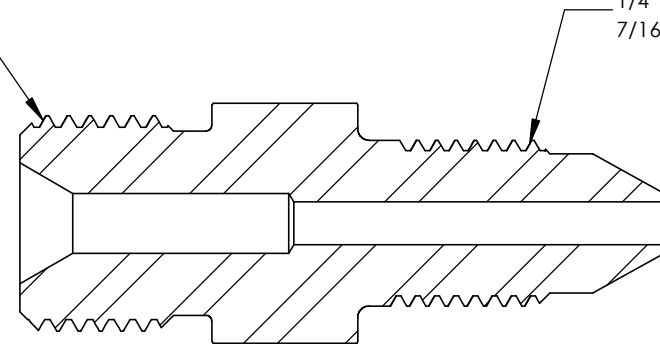

SECTION A-A

REVISION NOTES AND DATES

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES
TOLERANCES AS FOLLOWS:
1 PLACE DECIMAL (.0): ± 0.030
2 PLACE DECIMAL (.00): ± 0.020
3 PLACE DECIMAL (.000): ± 0.010
ANGLES: $\pm 2^\circ$

SURFACE FINISH: 63RMS
BREAK ALL EDGES: .010-.015
FILLETS & ROUNDS: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B
CHAMFER THREADS 45° TO ROOT
30° CHAMFER IS OPTIONAL
FOR MALE THREADS ONLY

	NAME	DATE
DRAWN	BM	8/19/2020
CHECKED	KH	8/19/2020

DATE STARTED IN PRODUCTION:

8/19/2020



**ULTRA PRESSURE COMPONENTS
HOUSTON, TX**

TITLE:

1/4" MP Male x 9/16" Type M Male
20,000 psi

SIZE	DWG. NO.	REV
A	5404-4MM9-CUST	1

SCALE: 2:1	WEIGHT: 0.08	SHEET 1 OF 1
------------	--------------	--------------